

HIT-1 / HIT-1 CE injection mortar

Anchor design (ETAG 029) / Rods and Sleeves / Masonry


Injection mortar system



Hilti HIT-1 / HIT-1 CE
300 ml tube cartridge



Anchor rods:
HAS-U
HAS-U HDG
HAS-U A4
HAS-U HCR
(M8-M12)

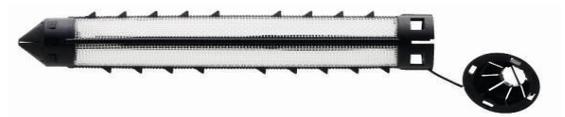


Sieve sleeve:
HIT-SC
(16)


Benefits

- Hollow and solid masonry: clay bricks
- Two-component hybrid mortar
- Rapid curing
- Suitable for overhead fastenings
- Versatile and convenient handling
- Flexible setting depth and fastening thickness
- Small edge distance and anchor spacing
- Mortar filling control with HIT-SC sleeves

Base material



Solid bricks



Hollow bricks



Static/
quasi-static

Load conditions

Installation conditions



Hammer/rotary
drilling

Approvals / certificates

Description	Authority / Laboratory	No. / date of issue
Hilti Technical Data ^{a)}	Hilti	2017-11-28

b) All data given in this section according to Hilti Technical Data.

Static and quasi-static loading (for a single anchor)

All data in this section applies to

- Load values valid for holes drilled with TE rotary hammers in hammer mode for solid bricks
- Load values valid for holes drilled with TE rotary hammers in rotary mode for hollow bricks
- Correct anchor setting (see instruction for use, setting details)
- Steel quality of fastening elements: see data below
- Threaded rods of appropriate size (diameter and length) and a minimum steel quality of 5.6 can be used
- Base material temperature during installation and curing must be between 0°C through +40°C
- In-service temperature ranges:
 Ta = -40°C to +40°C (max. long term temperature +24 °C and max.short term temperature +40 °C)
 Tb = -40°C to +80°C (max. long term temperature +50 °C and max.short term temperature +80 °C)

Recommended loads for solid and hollow bricks

Load type	Anchor size	h _{ef} [mm]	f _b [N/mm ²]	Loads [kN]		
				Ta	Tb	
Solid clay brick						
N _{Rec}	HAS-U	M8	80	28	0,7	0,4
		M10	90		0,7	0,4
		M12	100		0,7	0,4
	HAS-U + HIT-SC M16x85	M8	80	28	0,9	0,6
		M10			0,9	0,6
		M12			0,9	0,6
V _{Rec}	HAS-U	M8	80	28	1,3	
		M10	90		1,7	
		M12	100		2,5	
	HAS-U + HIT-SC M16x85	M8	80	28	1,3	
		M10			1,6	
		M12			1,7	
Hollow brick – Hz 12						
N _{Rec}	HAS-U + HIT-SC M16x85	M8	80	12	0,35	0,20
		M10			0,35	0,20
		M12			0,45	0,25
V _{Rec}	HAS-U + HIT-SC M16x85	M8, M10, M12	80	12	1,4	
Hollow brick – Doppio Uni						
N _{Rec}	HAS-U + HIT-SC M16x85	M8	80	28	0,25	0,15
		M10			0,25	0,20
		M12			0,35	0,20
V _{Rec}	HAS-U + HIT-SC M16x85	M8, M10, M12	80	28	0,85	

Due to the wide variety of bricks, site tests have to be performed for determination of load values for all applications outside of the above mentioned base materials and/or setting conditions.

Materials
Material quality

Part	Material
Zinc coated steel	
Threaded rod, HAS-U 5.8 (HDG)	Strength class 5.8; Elongation at fracture A5 > 8% ductile Electroplated zinc coated $\geq 5\mu\text{m}$; (HDG) hot dip galvanized $\geq 45\mu\text{m}$
Threaded rod, HAS-U 8.8 (HDG)	Strength class 8.8; Elongation at fracture A5 > 12% ductile Electroplated zinc coated $\geq 5\mu\text{m}$; (HDG) hot dip galvanized $\geq 45\mu\text{m}$
Washer	Electroplated zinc coated $\geq 5\mu\text{m}$, hot dip galvanized $\geq 45\mu\text{m}$
Nut	Strength class of nut adapted to strength class of threaded rod. Electroplated zinc coated $\geq 5\mu\text{m}$, hot dip galvanized $\geq 45\mu\text{m}$
Stainless Steel	
Threaded rod, HAS-U A4	Strength class 70 for M8-M12 Elongation at fracture A5 > 8% ductile Stainless steel 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362
Washer	Stainless steel 1.4401, 1.4404, 1.4578, 1.4571, 1.4439, 1.4362 EN 10088-1:2014
Nut	Stainless steel 1.4401, 1.4404, 1.4578, 1.4571, 1.4439, 1.4362 EN 10088-1:2014
High corrosion resistant steel	
Threaded rod, HAS-U HCR	Strength class 80 for M8-M12 Elongation at fracture A5 > 8% ductile High corrosion resistance steel 1.4529; 1.4565;
Washer	High corrosion resistant steel 1.4529, 1.4565 EN 10088-1:2014
Nut	High corrosion resistant steel 1.4529, 1.4565 EN 10088-1:2014
Sieve sleeve	
HIT-SC sleeve	Frame: FPP 20T, Sieve: PA6,6 N500/200

Setting information

Installation temperature range:

0°C to +40°C

Service temperature range

Hilti HIT-1 / HIT-1 CE injection mortar may be applied in the temperature ranges given below. An elevated base material temperature may lead to a reduction of the design bond resistance.

Temperature range	Base material temperature	Maximum long term base material temperature	Maximum short term base material temperature
Temperature range I	-40 °C to +40 °C	+24 °C	+40 °C
Temperature range II	-40 °C to +80 °C	+50 °C	+80 °C

Maximum short term base material temperature

Short term elevated base material temperatures are those that occur over brief intervals, e.g. as a result of diurnal cycling.

Maximum long term base material temperature


Long term elevated base material temperatures are roughly constant over significant periods of time.

Working time and curing time:


Temperature of the base material	Maximum working time	Minimum curing time
T_{BM}	t_{work}	t_{cure}
$0^{\circ}\text{C} \leq T_{BM} < 5^{\circ}\text{C}$	45 min	3 h
$5^{\circ}\text{C} \leq T_{BM} < 10^{\circ}\text{C}$	25 min	2 h
$10^{\circ}\text{C} \leq T_{BM} < 20^{\circ}\text{C}$	15 min	100 min
$20^{\circ}\text{C} \leq T_{BM} < 30^{\circ}\text{C}$	6 min	45 min
$30^{\circ}\text{C} \leq T_{BM} < 40^{\circ}\text{C}$	2 min	25 min

Setting details for solid bricks

Anchor size		M8		M10		M12	
Sieve sleeve	HIT-SC	-	16x85	-	16x85	-	16x85
Nominal diameter of drill bit	d_o [mm]	10	16	12	16	14	18
Maximum diameter of clearance hole in the fixture	d_f [mm]	9	9	12	12	14	14
Effective anchorage depth	h_{ef} [mm]	80	80	90	80	100	80
Hole depth	h_o [mm]	80	95	90	95	100	95
Minimum base material thickness	h_{min} [mm]	115	115	115	115	115	115
Maximum torque moment	T_{max} [Nm]	6	6	10	8	10	8

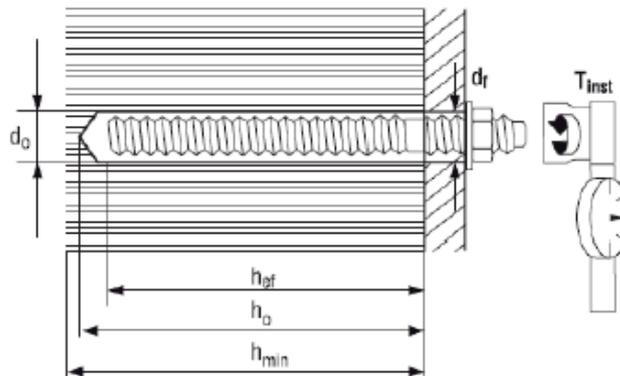
Setting details for hollow bricks

Anchor Size		M8		M10		M12	
		HLZ2	Doppio Uni	HLZ2	Doppio Uni	HLZ2	Doppio Uni
Sieve sleeve	HIT-SC	16x85		16x85		16x85	
Nominal diameter of drill bit	d_o [mm]	16		16		18	
Maximum diameter of clearance hole in the fixture	d_f [mm]	9		12		14	
Effective anchorage depth	h_{ef} [mm]	80		80		80	
Hole depth	h_o [mm]	95		95		95	
Minimum base material thickness	h_{min} [mm]	115		115		115	
Maximum torque moment	T_{max} [Nm]	4		4		4	

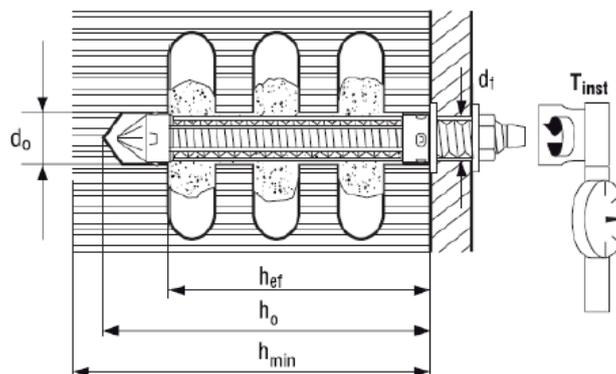

Installation equipment

Anchor – size	M8	M10	M12
Rotary hammer	TE2(-A) – TE30(-A)		
Other tools	Blow out pump Set of cleaning brushes, dispenser		

Cleaning and setting parameters for solid and hollow bricks

HAS-U	Sieve sleeve HIT-SC	Drilling	Cleaning
		Hammer drilling	Brush HIT-RB
		d ₀ [mm]	size [mm]
			
M8 ^{a)}	-	10	10
M10 ^{a)}	-	12	12
M12 ^{a)}	-	14	14
M8	HIT-SC 16x85	16	16
M10	HIT-SC 16x85	16	16
M12	HIT-SC 18x85	18	18

a) Installation without the sieve sleeve HIT-SC can be used only in case of solid bricks.

Setting instructions


*For detailed information on installation see instruction for use given with the package of the product.




Safety regulations.

Review the Material Safety Data Sheet (MSDS) before use for proper and safe handling! Wear well-fitting protective goggles and protective gloves when working with Hilti HIT-1 / HIT-1 CE.

Drilling

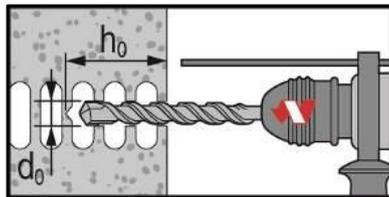


In hollow bricks: rotary mode

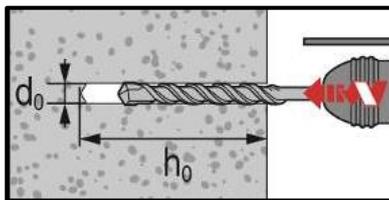

In solid bricks: hammer mode


Cleaning

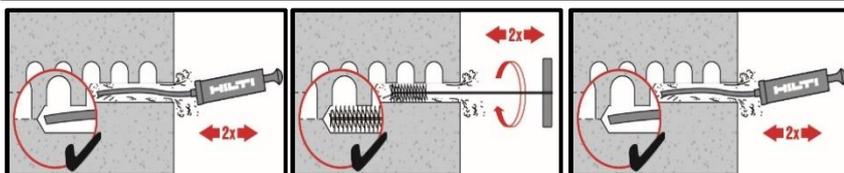


Manual cleaning (MC)

Instructions for solid bricks without sieve sleeve

Injection system

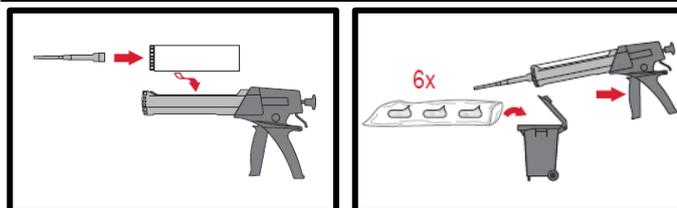


Injection system preparation.

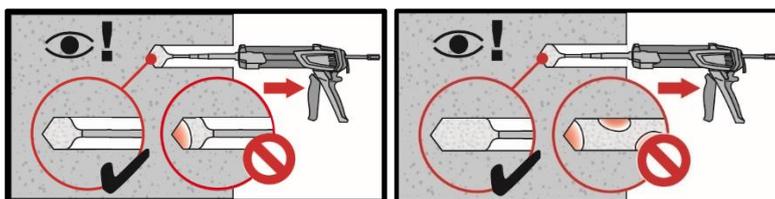


Injection method for drill hole

Setting the element

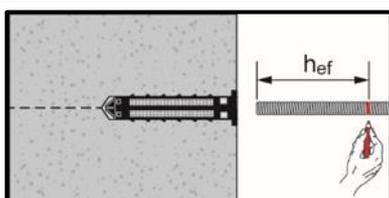


Presetting element, observe working time " t_{work} ",

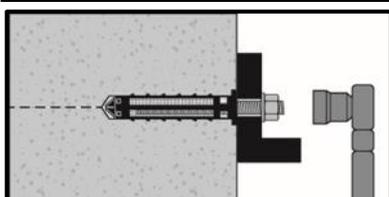

Loading the anchor: After required curing time t_{cure} the anchor can be loaded.


Instructions for hollow and solid bricks with sieve sleeve

Preparation of the sieve sleeve

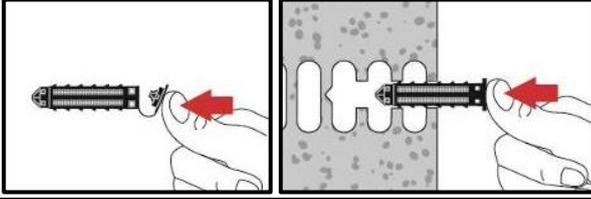


Close lid and insert sieve sleeve manually

Injection system

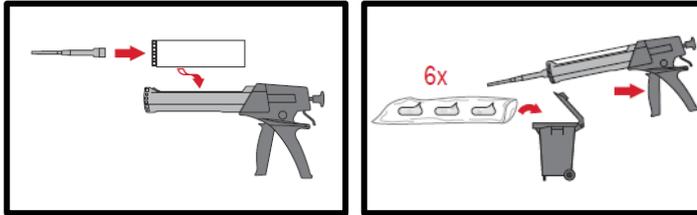


Injection system preparation.

Injection system: hollow bricks

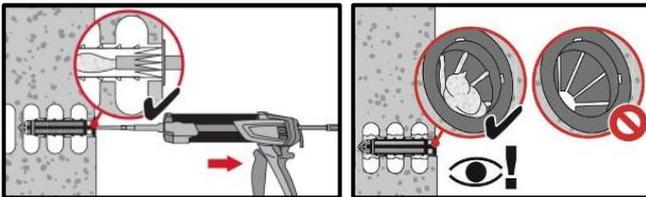


Installation with sieve sleeve HIT-SC

Setting the element

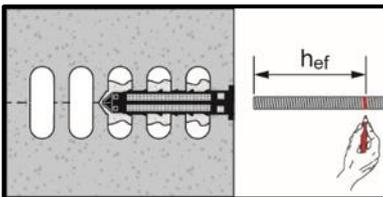

Presetting element, observe working time " t_{work} ",

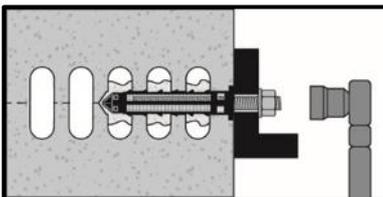

Loading the anchor: After required curing time t_{cure} the anchor can be loaded.