

Approval body for construction products  
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and  
Laender Governments



## European Technical Assessment

**ETA-07/0219**  
**of 28 June 2018**

English translation prepared by DIBt - Original version in German language

### General Part

Technical Assessment Body issuing the  
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Hilti frame anchor HRD

Product family  
to which the construction product belongs

Plastic anchor for multiple use in concrete and masonry  
for non-structural applications

Manufacturer

Hilti Aktiengesellschaft  
Business Unit Anchors  
9494 Schaan  
FÜRSTENTUM LIECHTENSTEIN

Manufacturing plant

Hilti Werke

This European Technical Assessment  
contains

23 pages including 3 annexes which form an integral part  
of this assessment

This European Technical Assessment is  
issued in accordance with Regulation (EU)  
No 305/2011, on the basis of

ETAG 020, March 2012,  
used as EAD according to Article 66 Paragraph 3 of  
Regulation (EU) No 305/2011.

This version replaces

ETA-07/0219 issued on 19 September 2017

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

## Specific Part

### 1 Technical description of the product

The Hilti frame anchor HRD in the sizes HRD 8 and HRD 10 is a plastic anchor consisting of a plastic sleeve made of polyamide and an accompanying specific screw of electro galvanised steel, hot-dip galvanised steel or stainless steel.

The plastic sleeve is expanded by screwing in the specific screw which presses the sleeve against the wall of the drilled hole.

The product description is given in Annex A.

### 2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchors of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Mechanical resistance and stability (BWR 1)

The essential characteristics regarding mechanical resistance and stability are included under the Basic Works Requirement Safety in use.

#### 3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for Class A 1
Resistance to fire	See Annex C 2

#### 3.3 Safety and accessibility (BWR 4)

Essential characteristic	Performance
Characteristic resistance for tension and shear loads	See Annexes C 1 - C 8
Characteristic resistance for bending moments	See Annex C 1
Displacements under shear and tension loads	See Annex C 8
Anchor distances and dimensions of members	See Annex B 5 - B 7

#### 3.4 General aspects

The verification of durability is part of testing the essential characteristics. Durability is only ensured if the specifications of intended use according to Annex B are taken into account.

**4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base**

In accordance with guideline for European technical approval ETAG 020, March 2012 used as European Assessment Document (EAD) according to Article 66 Paragraph 3 of Regulation (EU) No 305/2011 the applicable European legal act is: 97/463/EC.

The system to be applied is: 2+

**5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document**

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.


Issued in Berlin on 28 June 2018 by Deutsches Institut für Bautechnik

BD Dipl.-Ing. Andreas Kummerow  
Head of Department


*beglaubigt:*  
Aksünger

Installed condition

**Figure A1:**  
Intended use with different embedment depth in concrete [including thin skins (weather resistant skins of external wall panels)], solid brick, hollow brick and non-cracked autoclaved aerated concrete (AAC blocks)

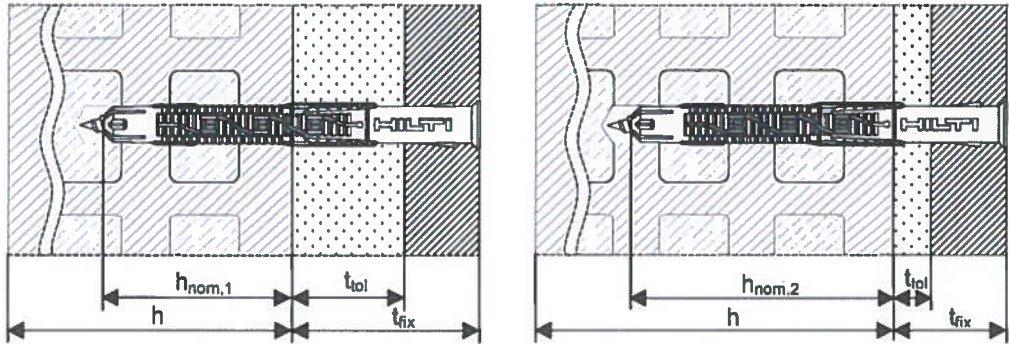

**Figure A2:**  
Intended use in precast prestressed hollow core slabs ( $w/e \leq 4,2$ )

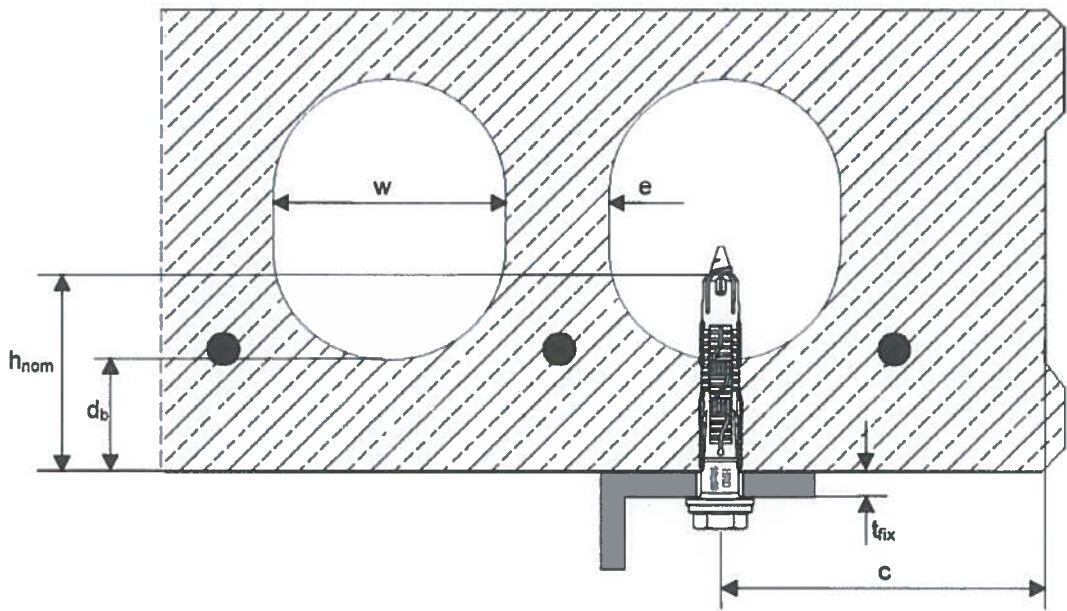

- |           |   |       |  |
|-----------|---|-------|--|
| $h_{nom}$ | = overall plastic anchor embedment depth in the base material | $c$   | = edge distance                        |
| $h$       | = thickness of member   | $d_b$ | = bottom flange thickness $\geq 25$ mm |
| $t_{fix}$ | = thickness of fixture  | $w$   | = core width                           |
| $t_{tol}$ | = thickness of non-load-bearing layer                         | $e$   | = web thickness                        |


Hilti frame anchor HRD	Annex A1
Product description Installed condition	



## Anchor types, marking and identification after installation

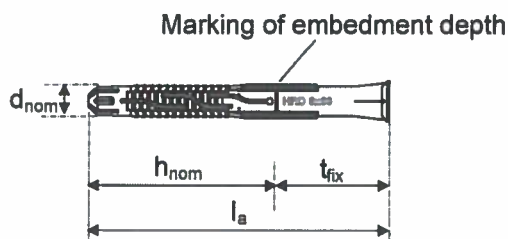
### HRD 8

#### Anchor sleeve



**Marking:**  
Producer, Type, size  
e.g. HRD 8x80


#### Special screw

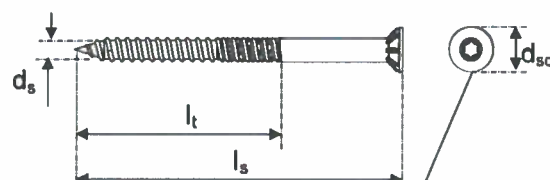

**Marking:**  
HDS-U

### HRD 10

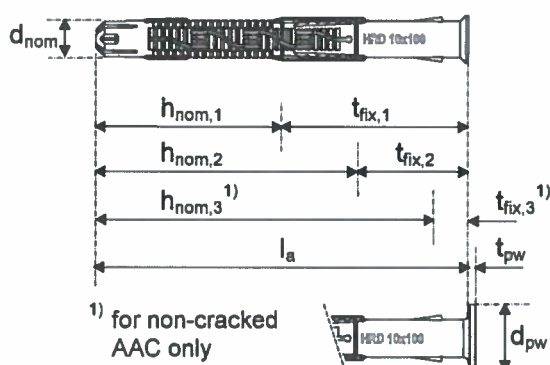
#### Anchor sleeve



<sup>1)</sup> for non-cracked AAC only

**Marking:**  
Producer, Type, Size  
e.g. HRD 10x100

#### Special screw

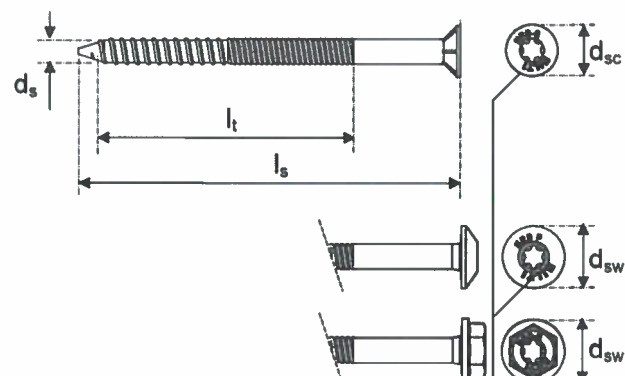

**Marking:**  
"HRD"-Type  
"HDS"-Type  
e.g. HRD-C, HDS-P, ...

Inner drive optional

### Naming

Product family Hilti frame anchor	HRD-CR2	10x180	Overall length of the anchor [mm] Anchor / hole diameter [mm]
Head configuration	C: H: K: P:	Screw material _: galvanised carbon steel F: hot dip galvanized R: stainless steel: 1.4362 / 1.4401 / 1.4404 / 1.4571 / 1.4578 R2: stainless steel: 1.4301 / 1.4567	

Hilti frame anchor HRD

Product description  
Anchor types, marking, naming

Annex A2

**Table A1: Dimensions**

			HRD 8	HRD 10
Plastic sleeve	Sleeve diameter	$d_{nom}$ [mm]	8	10
	Length of sleeve	min $l_a$ [mm]	60	60
		max $l_a$ [mm]	140	310
	Diameter of plastic washer	$d_{pw}$ [mm]	-	17,5
	Thickness of plastic washer	$t_{pw}$ [mm]	-	2
Special screw	Screw diameter	$d_s$ [mm]	6	7
	Length of screw	$l_s$ [mm]	$l_a + 5$	$l_a + 5$
	Length of thread	$l_t$ [mm]	53	70
	Head diameter	Countersunk screw $d_{sc}$ [mm]	11	14
		Hexhead screw $d_{sw}$ [mm]	-	17,5

**Table A2: Materials**

	HRD 8	HRD 10
Plastic sleeve	Polyamide, PA6, colour red	
Special screw	Steel, electro galvanised $\geq 5 \mu m$ , blue passivated, coated $f_{yk} = 480 \text{ N/mm}^2$ , $f_{uk} = 600 \text{ N/mm}^2$	
	-	Steel, hot-dip galvanized, $\geq 65 \mu m$ , coated $f_{yk} = 480 \text{ N/mm}^2$ , $f_{uk} = 600 \text{ N/mm}^2$
	Stainless steel: 1.4301 / 1.4567 (e.g. A2 acc. ISO 3506), coated $f_{yk} = 450 \text{ N/mm}^2$ , $f_{uk} = 580 \text{ N/mm}^2$	
	Stainless steel: 1.4362 / 1.4401 / 1.4404 / 1.4571 / 1.4578 (e.g. A4 acc. ISO 3506), coated $f_{yk} = 450 \text{ N/mm}^2$ , $f_{uk} = 580 \text{ N/mm}^2$	

Hilti frame anchor HRD

Product description  
Dimensions, materials

Annex A3

## Specifications of intended use

### Anchorage subject to:

- Static and quasi-static loads
- Multiple fixing of non-structural applications

### Base materials:

- Reinforced or unreinforced normal weight concrete with strength classes  $\geq C12/15$  (use category a) according to EN 206-1:2000 and according Annex C2.
- Precast prestressed hollow core slabs with strength classes  $\geq C35/55$  (use category a) according Annex C2.
- Solid brick masonry (use category b) according to Annex C3.  
Note: The characteristic resistance is also valid for larger brick sizes and higher compressive strength of the masonry unit.
- Hollow brick masonry (use category c) according to Annex C4 to C7.
- Autoclaved aerated concrete AAC (use category d) according to Annex C8.
- Mortar strength class of the masonry  $\geq M2,5$  according to EN 998-2:2010.
- For other base materials of the use categories a, b, c or d the characteristic resistance of the anchor may be determined by job site tests according to ETAG 020, Annex B, Edition March 2012.

### Temperature range:

- In-service  
-40 °C to +80 °C (max. long term temperature +50 °C and max. short term temperature +80 °C)

### Use conditions (Environmental conditions):

- Hilti frame anchor HRD, HRD-F, HRD-R and HRD-R2:  
Structures subject to dry internal conditions  
The specific screw made of galvanized steel may also be used in structures subject to external atmospheric exposure, if the area of the head of the screw is protected against moisture and driving rain after mounting of the fixing unit in this way, that intrusion of moisture into the anchor shaft is prevented. Therefore there shall be an external cladding or a ventilated rainscreen mounted in front of the head of the screw and the head of the screw itself shall be coated with a soft plastic, permanently elastic bitumen-oil-combination coating (e. g. undercoating or body cavity protection for cars).
- Hilti frame anchor HRD, HRD-F, HRD-R and HRD-R2:  
Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist (stainless steel).  
Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used).

Hilti frame anchor HRD

Specifications of intended use

Annex B1



**Design:**

- The anchorages are to be designed in accordance with the ETAG 020, Annex C under the responsibility of an engineer experienced in anchorages and masonry work.
- Verifiable calculation notes and drawings shall be prepared taking account of the loads to be anchored, the nature and strength of the base materials and the dimensions of the anchorage members as well as of the relevant tolerances. The position of the anchor is indicated on the design drawings.
- Fasteners are only to be used for multiple use for non-structural application according to ETAG 020, Edition March 2012.

**Installation:**

- Hole drilling by the drill modes according to Annex B 8.
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- Temperature at installation  
-10 °C to +40 °C
- Exposure to UV due to solar radiation of the anchor not protected ≤ 6 weeks

Hilti frame anchor HRD

Specifications of intended use

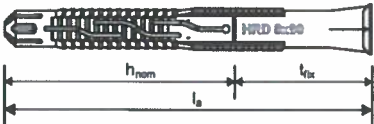
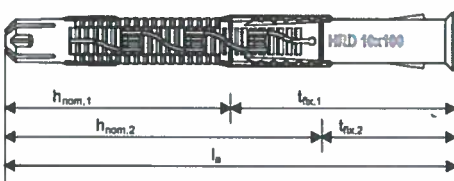
Annex B2

**Table B1: Installation parameters**

			HRD 8	HRD 10
Drill hole diameter	$d_0 =$	[mm]	8	10
Cutting diameter of drill bit	$d_{cut} \leq$	[mm]	8,45	10,45
Depth of drilled hole to deepest point	$h_{1,1} \geq$	[mm]	60	60
	$h_{1,2} \geq$	[mm]	-	80
	$h_{1,3} \geq$	[mm]	-	100 <sup>1)</sup>
Overall plastic anchor embedment depth in base material	$h_{nom,1} \geq$	[mm]	50	50
	$h_{nom,2} \geq$	[mm]	-	70
	$h_{nom,3} \geq$	[mm]	-	90 <sup>1)</sup>
Diameter of clearance hole in the fixture	Countersunk screw $d_f \leq$	[mm]	8,5	11
	Hexhead screw $d_f \leq$	[mm]	-	12

<sup>1)</sup> for non-cracked AAC only

**Table B2: Relation of  $h_{nom}$ ,  $l_a$  and  $t_{fix}$  for use in concrete and masonry**

		HRD 8 x $l_a$		HRD 10 x $l_a$	
Use category "a, b, c"		$h_{nom} \geq 50$ <sup>1)</sup>		$h_{nom,1} \geq 50$ <sup>1)</sup>	$h_{nom,2} \geq 70$ <sup>1)</sup>
		$l_a$	$t_{fix}$	$t_{fix,1}$	$t_{fix,2}$
HRD 8		[mm]	[mm]	[mm]	[mm]
	60	$\leq 10$	$\leq 10$	—	—
	80	$\leq 30$	$\leq 30$	$\leq 10$	$\leq 10$
	100	$\leq 50$	$\leq 50$	$\leq 30$	$\leq 30$
	120	$\leq 70$	$\leq 70$	$\leq 50$	$\leq 50$
	140	$\leq 90$	$\leq 90$	$\leq 70$	$\leq 70$
	160	-	$\leq 110$	$\leq 90$	$\leq 90$
	180	-	$\leq 130$	$\leq 110$	$\leq 110$
	200	-	$\leq 150$	$\leq 130$	$\leq 130$
	230	-	$\leq 180$	$\leq 160$	$\leq 160$
	270	-	$\leq 220$	$\leq 200$	$\leq 200$
	310	-	$\leq 260$	$\leq 240$	$\leq 240$

<sup>1)</sup> The influence of  $h_{nom} > 50$  mm (HRD 8) or  $h_{nom,1} > 50$  mm or  $h_{nom,2} > 70$  mm (HRD 10) has to be checked by job-site testing according Annex B1


Hilti frame anchor HRD

Intended use


Installation parameters, Relations of  $h_{nom}$ ,  $l_a$  and  $t_{fix}$

Annex B3

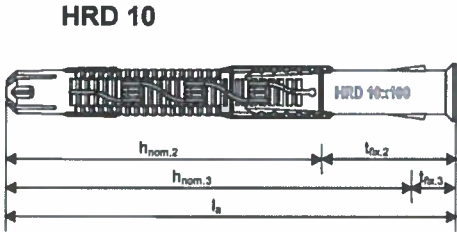**Table B3: Relation of  $h_{nom}$ ,  $l_a$  and  $t_{fix}$  for use in autoclaved aerated concrete (AAC)**

Use category "d"		HRD 8 x $l_a$	HRD 10 x $l_a$	
			$h_{nom,2} \geq 70$	$h_{nom,3} \geq 90$
		$l_a$	$t_{fix,2}$	$t_{fix,3}$
		[mm]	[mm]	[mm]
		60	-	-
		80	$\leq 10$	-
		100	$\leq 30$	$\leq 10$
		120	$\leq 50$	$\leq 30$
		140	$\leq 70$	$\leq 50$
		160	$\leq 90$	$\leq 70$
		180	$\leq 110$	$\leq 90$
		200	$\leq 130$	$\leq 110$
		230	$\leq 160$	$\leq 140$
		270	$\leq 200$	$\leq 180$
		310	$\leq 240$	$\leq 220$

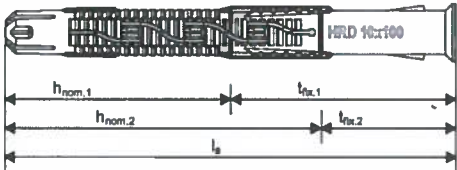**Table B4: Relation of  $h_{nom}$ ,  $l_a$  and  $t_{fix}$  for use in thin skins (weather resistant skins of external wall panels) and precast prestressed hollow core slabs**

Use category "a"		HRD 8 x $l_a$	HRD 10 x $l_a$	
			$h_{nom,1} \geq 50$	
		$l_a$	$t_{fix,min}$	$t_{fix,max}$
		[mm]	[mm]	[mm]
		60	2	10
		80	22	30
		100	42	50
		120	62	70
		140	82	90
		160	102	110
		180	122	130
		200	142	150
		230	172	180
		270	212	220
		310	252	260

Hilti frame anchor HRD

Intended use  
Relations of  $h_{nom}$ ,  $l_a$  and  $t_{fix}$

Annex B4


**Table B5: Minimum thickness of member, edge distance and anchor spacing in concrete and thin skins (use category "a")**

			HRD 8	HRD 10	
Overall plastic anchor embedment depth in the base material $h_{nom} \geq$ [mm]			50	50	70
Minimum thickness of member	concrete $h_{min}$	[mm]	100	100	120
	thin skin $h_{min}$	[mm]	-	40	-
Minimum spacing	$\geq C16/20$ $s_{min}$	[mm]	100	50 if $c \geq 100$ <sup>1)</sup>	
	C12/15 $s_{min}$	[mm]	140	70 if $c \geq 140$ <sup>1)</sup>	
Minimum edge distance	$\geq C16/20$ $c_{min}$	[mm]	50	50 if $s \geq 150$ <sup>1)</sup>	
	C12/15 $c_{min}$	[mm]	70	70 if $s \geq 210$ <sup>1)</sup>	
Characteristic edge distance	$\geq C16/20$ $c_{cr,N}$	[mm]	100	100	
	C12/15 $c_{cr,N}$	[mm]	140	140	
Characteristic spacing <sup>2)</sup>	$\geq C16/20$ $s_{cr,N}$	[mm]	62	80	125
	C12/15 $s_{cr,N}$	[mm]	68	90	135

<sup>1)</sup> Linear interpolation allowed

<sup>2)</sup> Spacing at which a fixing point that consists of more than 1 anchor can be calculated with the characteristic resistance  $N_{Rk,p}$  of each anchor.

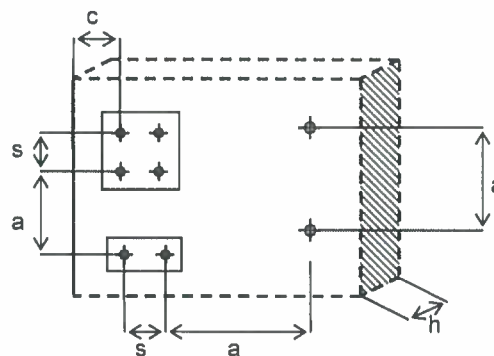**Scheme of distances and spacing**



**Hilti frame anchor HRD**

**Intended Use**


Minimum spacing and minimum edge distance in concrete

**Annex B5**

**Table B6: Anchor positions, minimum spacing and edge distance of anchors and distance between anchor groups in precast prestressed hollow core slabs**

		HRD 8	HRD 10
Overall plastic anchor embedment depth in the base material	$h_{nom} \geq$ [mm]	-	50
Bottom flange thickness	$d_b \geq$ [mm]	-	25
Core distance	$l_c \geq$ [mm]	-	100
Prestressing steel distance	$l_p \geq$ [mm]	-	100
Distance between anchor position and prestressing steel	$a_p \geq$ [mm]	-	50
Minimum edge distance	$c_{min} \geq$ [mm]	-	100
Minimum anchor spacing	$s_{min} \geq$ [mm]	-	100
Minimum distance between anchor groups	$a_{min} \geq$ [mm]	-	100

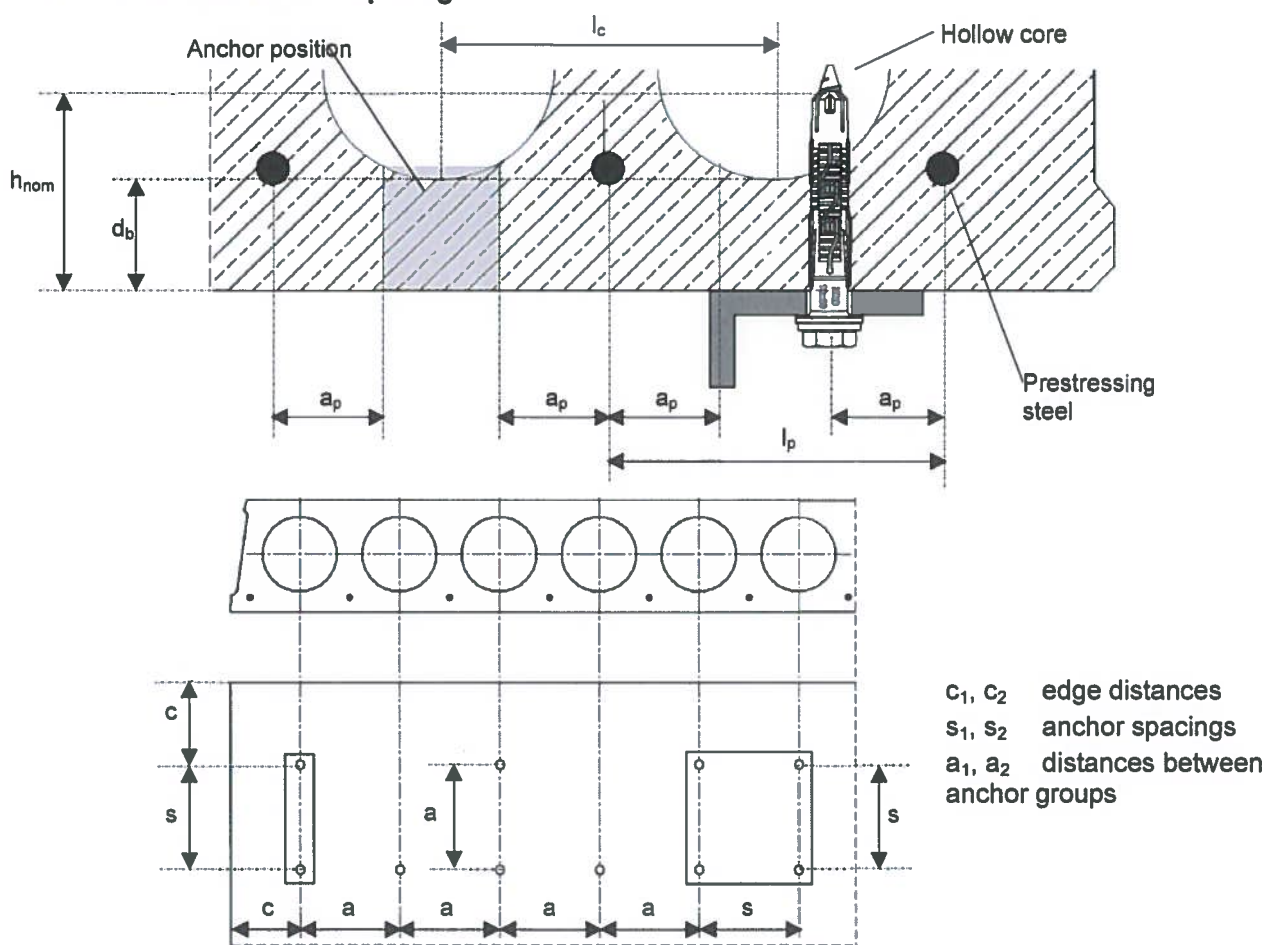**Schemes of distances and spacing**



Hilti frame anchor HRD

**Intended Use**

Minimum spacing and minimum edge distance in precast prestressed hollow core slabs

**Annex B6**



**Table B7: Minimum thickness of member, edge distance and anchor spacing in solid and hollow masonry (use category "b, c")**


			HRD 8	HRD 10
Minimum thickness of member	$h_{\min}$	[mm]	see Table C4, Table C5	see Table C4- Table C6
Minimum edge distance	$c_{\min}$	[mm]	100 (60) <sup>1)</sup>	100
Minimum spacing (single anchor)	$a_{\min}$	[mm]	250	250
Minimum spacing (anchor group)	perpendicular to free edge $s_{\min1}$	[mm]	200 (120) <sup>1)</sup>	100
	parallel to free edge $s_{\min2}$	[mm]	400 (240) <sup>1)</sup>	100

<sup>1)</sup> only for brick "Doppio Uni" and "Mattone"

**Table B8: Minimum thickness of member, edge distance and anchor spacing in non-cracked autoclaved aerated concrete (AAC blocks, use category "d")**

			HRD 8	HRD 10
Minimum thickness of member	AAC 2 $h_{\min}$	[mm]	-	200
	AAC 4 $h_{\min}$	[mm]	-	240
	AAC 6 $h_{\min}$	[mm]	-	240
Minimum edge distance	$c_{\min}$	[mm]	-	100
Minimum spacing (single anchor)	$a_{\min}$	[mm]	-	250
Minimum spacing (anchor group)	perpendicular to free edge $s_{\min1}$	[mm]	-	100
	parallel to free edge $s_{\min2}$	[mm]	-	100

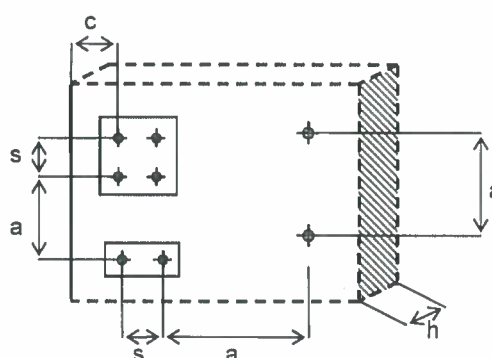**Scheme of distances and spacing**





**Hilti frame anchor HRD**

**Intended Use**

Minimum spacing and minimum edge distance in masonry and AAC



**Annex B7**
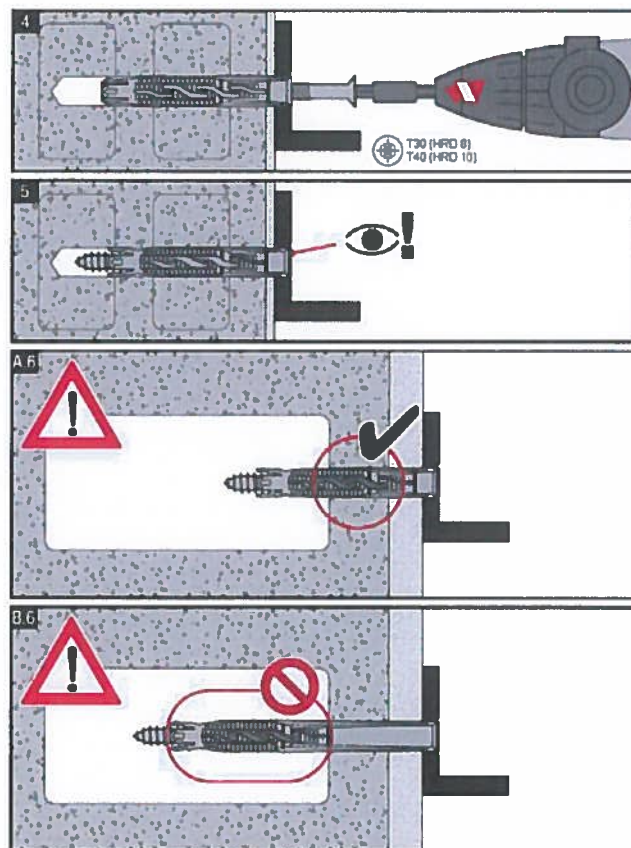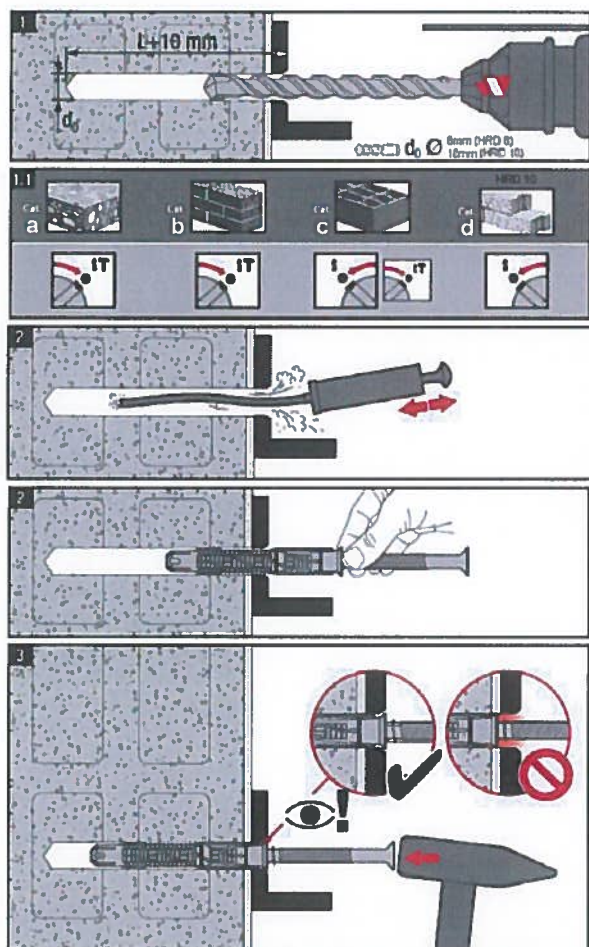
## Installation instruction



### Additional preparation in case of application in precast prestressed hollow core slabs

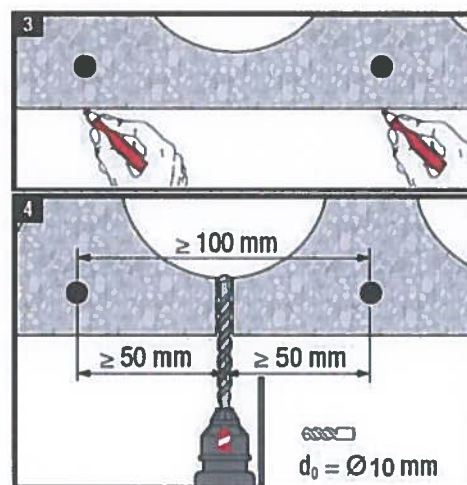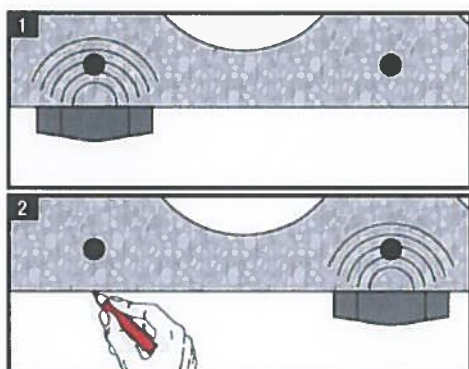After drilling follow the main instruction above



Hilti frame anchor HRD

Intended Use  
Installation instruction

Annex B8

**Table C1: Characteristic resistance of the screw**

			HRD 8	HRD 10
<b>galvanised steel</b>				
Characteristic tension resistance	$N_{Rk,s}$	[kN]	10,9	17,5
Partial safety factor for tension	$\gamma_{Ms}^{1)}$	[-]	1,50	1,50
Characteristic shear resistance	$V_{Rk,s}$	[kN]	6,9	10,6
Characteristic bending resistance	$M_{Rk,s}$	[Nm]	11,1	21,3
Partial safety factor for shear and bending	$\gamma_{Ms}^{1)}$	[-]	1,25	1,25
<b>Hot-dip galvanized steel</b>				
Characteristic tension resistance	$N_{Rk,s}$	[kN]	-	16,7
Partial safety factor for tension	$\gamma_{Ms}^{1)}$	[-]	-	1,50
Characteristic shear resistance	$V_{Rk,s}$	[kN]	-	10,1
Characteristic bending resistance	$M_{Rk,s}$	[Nm]	-	19,9
Partial safety factor for shear and bending	$\gamma_{Ms}^{1)}$	[-]	-	1,25
<b>Stainless steel</b>				
Characteristic tension resistance	$N_{Rk,s}$	[kN]	10,5	18,4
Partial safety factor for tension	$\gamma_{Ms}^{1)}$	[-]	1,54	1,58
Characteristic shear resistance	$V_{Rk,s}$	[kN]	6,6	11,1
Characteristic bending resistance	$M_{Rk,s}$	[Nm]	10,8	22,3
Partial safety factor for shear and bending	$\gamma_{Ms}^{1)}$	[-]	1,28	1,31

<sup>1)</sup> In absence of other national regulations

**Hilti frame anchor HRD**

**Performances**

Characteristic resistance of the screw

**Annex C1**

**Table C2: Characteristic resistance for pull-out failure (plastic sleeve) for use in concrete (use category "a")**

		HRD 8	HRD 10	
Embedment depth	$h_{nom} \geq$ [mm]	50	50	70
<b><u>Pull-out failure in standard concrete slabs</u></b>				
Characteristic resistance	$\geq C16/20$ $N_{Rk,p}$ [kN]	3,0	4,5	8,5
	$C12/15$ $N_{Rk,p}$ [kN]	2,0	3,0	6,0
Partial safety factor	$\gamma_{Mc}^{1)}$ [-]	1,8		
<b><u>Pull-out failure in thin skins (weather resistant skins of external wall panels), with h = 40mm to 100mm</u></b>				
Characteristic resistance	$\geq C16/20$ $N_{Rk,p}$ [kN]	-	3,5	-
	$C12/15$ $N_{Rk,p}$ [kN]	-	2,5	-
Partial safety factor	$\gamma_{Mc}^{1)}$ [-]	1,8		
<b><u>Pull-out failure in precast prestressed hollow core slabs, with concrete strength <math>\geq C35/45</math></u></b>				
Characteristic resistance	$d_b \geq 25\text{mm}$ $N_{Rk,p}$ [kN]	-	0,6	-
	$d_b \geq 30\text{mm}$ $N_{Rk,p}$ [kN]	-	1,5	-
	$d_b \geq 35\text{mm}$ $N_{Rk,p}$ [kN]	-	2,5	-
	$d_b \geq 40\text{mm}$ $N_{Rk,p}$ [kN]	-	3,5	-
Partial safety factor	$\gamma_{Mc}^{1)}$ [-]	1,8		

<sup>1)</sup> In absence of other national regulations

**Table C3: Values under fire exposure in concrete C20/25 to C50/60 in any load direction, no permanent centric tension load and without lever arm**

		HRD 8	HRD 10
Fire resistance class: R 90	$F^{1)}$ [kN]	-	0,8

<sup>1)</sup>  $F = F_{Rk} / (\gamma_M \cdot \gamma_F)$

Hilti frame anchor HRD

**Performances**

Characteristic resistance for pull-out in concrete, values under fire exposure

**Annex C2**



**Table C4: Characteristic resistance for use in solid masonry (use category "b")<sup>1)</sup>**

		Characteristic resistance $F_{Rk}$ [kN]		
		HRD 8	HRD 10	
		$h_{nom} \geq 50$	$h_{nom} \geq 50$	$h_{nom} \geq 70$
Clay brick <b>Mz 2,0-2DF</b> DIN V 105-100:2012-01 / EN 771-1:2011 Manufacturer: Augsburger Ziegel LxWxH [mm]: 240x115x113 $h_{min}$ [mm]: 115	$f_b \geq 20^{5)}$	1,5	3,0	4)
			4,5 <sup>3)</sup>	
	$f_b \geq 10^{5)}$	1,2	2,0	4)
			3,0 <sup>3)</sup>	
Sand-lime solid brick <b>KS 2,0-2DF</b> Manufacturer: Werk Derching DIN V 106:2005-10 / EN 771-2:2011 LxWxH [mm]: 240x115x113 $h_{min}$ [mm]: 115	$f_b \geq 20^{5)}$	2,5	3,0	4)
			4,5 <sup>3)</sup>	
	$f_b \geq 10^{5)}$	2,0	2,0	4)
			3,0 <sup>3)</sup>	
Lightweight concrete solid block <b>Vbl / V</b> Manufacturer: KLB DIN V 18152-100:2005-10 / EN 771-3:2011 LxWxH [mm]: 240x300x115 $h_{min}$ [mm]: 240	$f_b \geq 20^{5)}$	-	3,5	4)
			6,0 <sup>3)</sup>	
	$f_b \geq 10^{5)}$	-	2,5	4)
			4,5 <sup>3)</sup>	
	$f_b \geq 2^{5)}$	0,5	-	-
Partial safety factor $\gamma_{Mm}^{2)}$ [-]		2,5		

1) Drilling method: hammer drill

2) In absence of other national regulations

3) Valid for edge distance  $c \geq 150$  mm, intermediate values can be interpolated

4) Data can be determined by job-site testing, data for  $h_{nom} = 50$  mm can be applied

5) Mean compressive strength [N/mm<sup>2</sup>]

Hilti frame anchor HRD








Performances

Characteristic resistance in solid masonry

Annex C3



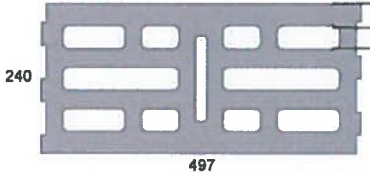**Table C5: Characteristic resistance for use in hollow masonry (use cat. "c") for HRD 8**

Base material			Compressive strength-class [N/mm <sup>2</sup> ]	Characteristic resistance $F_{Rk}$ [kN] $h_{nom} \geq 50$ <sup>1)</sup>
Specifications	Brick dimensions	Drilling methods		
Vertically perforated clay brick  <b>HLz B 12/1,2</b> DIN V 105-100:2012-01 / EN 771-1:2011 LxWxH [mm]: 300x240x248 $h_{min}$ [mm]: 240		rotary drilling only	$\geq 12$	0,5
Vertically perforated sand-lime brick  <b>KSL 12/1,4</b> DIN V 106:2005-10 / EN 771-2:2011 LxWxH [mm]: 240x248x248 $h_{min}$ [mm]: 240		hammer drilling	$\geq 12$	0,75
Lightweight concrete hollow block  <b>Hbl 2/0,8</b> DIN V 18151-100 / EN 771-3 LxWxH [mm]: 497x240x248 $h_{min}$ [mm]: 240		hammer drilling	$\geq 2$	0,3
Ital. Hollow brick  <b>Doppio Uni</b> EN 771-1:2011 LxWxH [mm]: 230x120x100 $h_{min}$ [mm]: 120		rotary drilling only	$f_b \geq 25$ <sup>4)</sup>	0,9
Ital. Hollow brick  <b>Mattone</b> EN 771-1:2011 LxWxH [mm]: 240x180x100 $h_{min}$ [mm]: 180		rotary drilling only	$f_b \geq 22$ <sup>4)</sup>	1,5
Span. Ladrillo cara vista  <b>Rojo hidrofugano</b> EN 771-1:2011 LxWxH [mm]: 240x115x50 $h_{min}$ [mm]: 115		rotary drilling only	$f_b \geq 40$ <sup>4)</sup>	0,6
French Hollow brick  <b>Brique Creuse C</b> EN 771-1:2011 LxWxH [mm]: 210x198x... $h_{min}$ [mm]: 210		rotary drilling only	$f_b \geq 6$ <sup>4)</sup>	0,5
Partial safety factor $\gamma_{Mm}$ <sup>2)</sup>			[-]	2,5

Footnotes see Table C6






## Hilti frame anchor HRD

### Performances

Characteristic resistance in hollow masonry for HRD 8

Annex C4

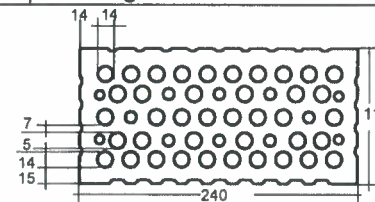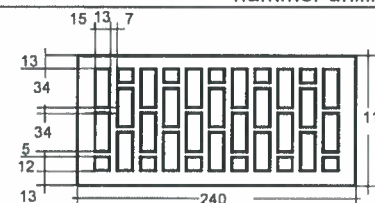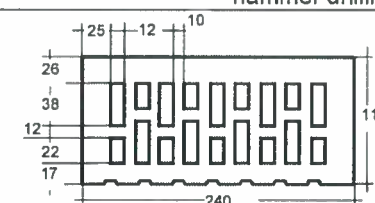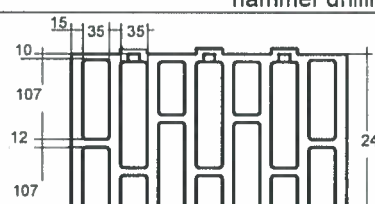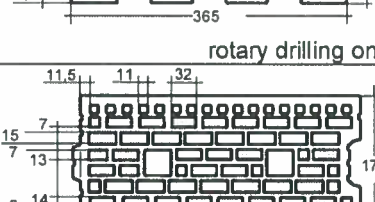**Table C6: Characteristic resistance for use in hollow masonry (use cat. "c") for HRD 10**

Base material			Compressive strength-class [N/mm <sup>2</sup> ]	Characteristic resistance F <sub>Rk</sub> [kN]	
Specifications	Brick dimensions	Drilling methods		h <sub>nom</sub> ≥ 50 <sup>1)</sup>	h <sub>nom</sub> ≥ 70 <sup>1)</sup>
Vertically perforated clay brick		hammer drilling	≥ 8	1,5	-
<b>Hlz 1,2-2DF</b> Manufacturer: Schlagmann DIN V 105-100:2012-01 / EN 771-1:2011 LxWxH [mm]: 240x115x113 h <sub>min</sub> [mm]: 115			≥ 10	2,0	-
			≥ 12	2,0	-
Vertically perforated clay brick		hammer drilling	≥ 8	0,4	0,75
<b>Hlz 1,0-2DF</b> Manufacturer: Ott Ziegel DIN V 105-100:2012-01 / EN 771-1:2011 LxWxH [mm]: 240x115x113 h <sub>min</sub> [mm]: 115			≥ 10	0,5	0,9
			≥ 12	0,6	0,9
			≥ 20	0,9	1,5
Vertically perforated clay brick		hammer drilling	≥ 28	2,0	2,5
<b>VHlz 1,6-2DF</b> Manufacturer: Wienerberger DIN V 105-100:2012-01 / EN 771-1:2011 LxWxH [mm]: 240x115x113 h <sub>min</sub> [mm]: 115			f <sub>b</sub> ≥ 50 <sup>4)</sup>	3,0	3,5
Vertically perforated clay brick		rotary drilling only	≥ 6	0,75	1,5
<b>Poroton T8</b> Manufacturer: Wienerberger Z-17.1-982 of 14.10.2016 LxWxH [mm]: 248x365x249 h <sub>min</sub> [mm]: 365					
Vertically perforated clay brick		rotary drilling only	≥ 8	1,2	1,5
<b>Hlz 1,0-9DF</b> Manufacturer: Bergmann DIN V 105-100:2012-01 / EN 771-1:2011 LxWxH [mm]: 372x175x238 h <sub>min</sub> [mm]: 175			≥ 10	1,5	1,5
			≥ 12	1,5	2,0
			≥ 16	2,0	2,5
Partial safety factor $\gamma_{Mm}$ <sup>2)</sup>			[-]		
			2,5		





Hilti frame anchor HRD

Performances

Characteristic resistance in hollow masonry for HRD 10

Annex C5

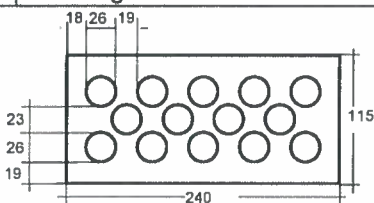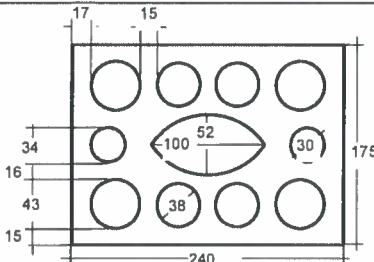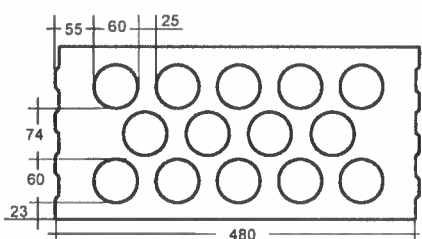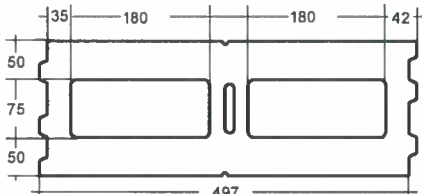Table C6: continued

Base material			Compressive strength-class [N/mm <sup>2</sup> ]	Characteristic resistance F <sub>Rk</sub> [kN]	
Specifications	Brick dimensions	Drilling methods		h <sub>nom</sub> ≥ 50 <sup>1)</sup>	h <sub>nom</sub> ≥ 70 <sup>1)</sup>
Vertically perforated sand-lime brick		hammer drilling	≥ 8	1,5	-
<b>KS L 1,6-2DF</b> Manufacturer: Werk B'güssbach DIN V 106:2005-10 / EN 771-2:2011 LxWxH [mm]: 240x115x113 h <sub>min</sub> [mm]: 115			≥ 10	1,5	-
			≥ 12	2,0	-
Vertically perforated sand-lime brick		hammer drilling	≥ 8	-	2,0
<b>KS L 1,4-3DF</b> Manufacturer: Werk B'güssbach DIN V 106:2005-10 / EN 771-2:2011 LxWxH [mm]: 240x175x113 h <sub>min</sub> [mm]: 175			≥ 10	-	2,5
			≥ 12	-	3,0
Vertically perforated sand-lime brick		rotary drilling only	≥ 8	0,9	1,2
<b>KS L R 1,6-16DF</b> Manufacturer: Werk Derching DIN V 106:2005-10 / EN 771-2:2011 LxWxH [mm]: 480x240x248 h <sub>min</sub> [mm]: 240			≥ 10	1,2	1,5
			≥ 12	1,5	2,0
			≥ 16	2,0	2,5
Lightweight concrete hollow block		rotary drilling only	≥ 2	0,5	0,75
<b>Hbl 1,2-9DF</b> Manufacturer: KBL DIN V 18151-100:2005-10 / EN 771-3:2011 LxWxH [mm]: 497x175x238 h <sub>min</sub> [mm]: 175			≥ 6	1,2	2,0
Partial safety factor <sup>2)</sup> γ <sub>Mm</sub>			[-]		
			2,5		





Hilti frame anchor HRD

Performances

Characteristic resistance in hollow masonry for HRD 10

Annex C6

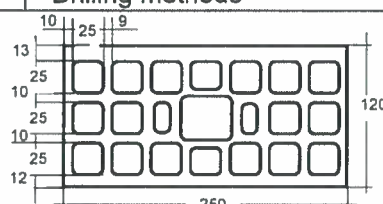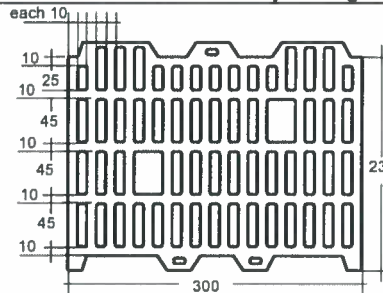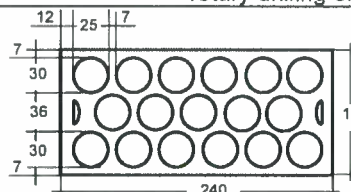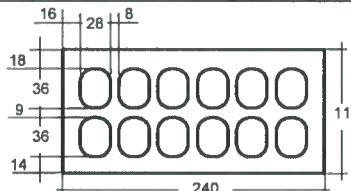Table C6: continued

Base material			Compressive strength-class [N/mm <sup>2</sup> ]	Characteristic resistance $F_{Rk}$ [kN]	
Specifications	Brick dimensions	Drilling methods		$h_{nom} \geq 50$ <sup>1)</sup>	$h_{nom} \geq 70$ <sup>1)</sup>
<b>Ital. Hollow brick</b>  <b>Doppio Uni</b> Manufacturer: Danesi EN 771-1:2011 LxWxH [mm]: 250x120x190 h <sub>min</sub> [mm]: 120		rotary drilling only	$f_b \geq 25$ <sup>4)</sup>	<sup>3)</sup>	1,5
<b>Ital. Hollow brick</b>  <b>Poroton P700</b> Manufacturer: Danesi EN 771-1:2011 LxWxH [mm]: 225x300x190 h <sub>min</sub> [mm]: 300		rotary drilling only	$f_b \geq 15$ <sup>4)</sup>	<sup>3)</sup>	0,6
<b>Span. Hollow brick</b>  <b>Ladrillo perforado</b> Manufacturer: La Oliva EN 771-1:2011 LxWxH [mm]: 240x110x100 h <sub>min</sub> [mm]: 110		rotary drilling only	$f_b \geq 26$ <sup>4)</sup>	1,5	2,0
<b>Span. Hollow brick</b>  <b>Clinker mediterraneo</b> Manufacturer: - EN 771-1:2011 LxWxH [mm]: 240x113x50 h <sub>min</sub> [mm]: 113		hammer drilling	$f_b \geq 75$ <sup>4)</sup>	<sup>3)</sup>	1,5
Partial safety factor $\gamma_{Mm}$ <sup>2)</sup>			2,5		

<sup>1)</sup> The influence of  $h_{nom} > 50$  mm (HRD 8) or  $h_{nom,1} > 50$  mm or  $h_{nom,2} > 70$  mm (HRD 10) has to be checked by job-site testing according Annex B1

<sup>2)</sup> In absence of other national regulations

<sup>3)</sup> Data can be determined by job site tests

<sup>4)</sup> Mean compressive strength [N/mm<sup>2</sup>]

Hilti frame anchor HRD

Performances

Characteristic resistance in hollow masonry for HRD 10

Annex C7

**Table C7: Characteristic resistance for use in non-cracked autoclaved aerated concrete (AAC blocks, use category "d")<sup>1)</sup>**

				HRD 8	HRD 10	
				$h_{nom} \geq 50$	$h_{nom,2} \geq 70$	$h_{nom,3} \geq 90$
Characteristic resistance in non-cracked autoclaved aerated concrete (AAC blocks), EN 771-4:2011	AAC 2	$F_{Rk}$	[kN]	-	0,9	0,9
	AAC 4	$F_{Rk}$	[kN]	-	2,0	2,0
		$F_{Rk}$	[kN]	-	2,0 <sup>3)</sup>	2,5 <sup>3)</sup>
	AAC 6	$F_{Rk}$	[kN]	-	2,0	2,5
		$F_{Rk}$	[kN]	-	3,5 <sup>3)</sup>	4,5 <sup>3)</sup>
	Partial safety factor $\gamma_{MAAC}$ <sup>2)</sup>			2,0		

<sup>1)</sup> Drilling method: rotary drilling only

<sup>2)</sup> In absence of other national regulations

<sup>3)</sup> Valid for edge distance  $c \geq 150\text{mm}$ , intermediate values can be interpolated

**Table C8: Displacements under tension and shear loading in concrete, solid and hollow masonry and non-cracked ACC (use category "a, b, c, d")**

			HRD 8	HRD 10		
Embedment depth	$h_{nom} \geq$	[mm]	50	50	70	90 <sup>1)</sup>
Displacement under tension load	F	[kN]	1,2	1,8	3,3	1,6
	$\delta_{NO}$	[mm]	0,3	0,5	0,9	1,0
	$\delta_{N\infty}$	[mm]	0,6	1,0	1,8	2,0
Displacement under shear load	F	[kN]	1,2	1,8	3,3	1,6
	$\delta_{VO}$	[mm]	1,0	1,5	2,8	3,2
	$\delta_{V\infty}$	[mm]	1,5	2,3	4,2	4,8

<sup>1)</sup> for use in non-cracked AAC

Hilti frame anchor HRD

**Performances**

Characteristic resistance in AAC, Displacements for all base materials

**Annex C8**